
PNEUMATRON

www.pneumatron.co.za sales01@pneumatron.co.za

5/2 Way Pneumatic Solenoid Valve
P4V Series Single Solenoid Series

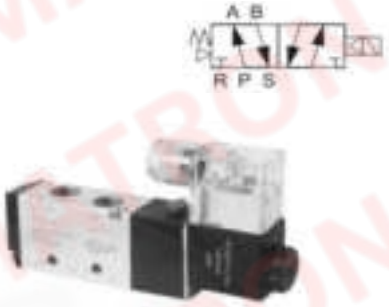

Specifications

Working media: Filtered Air
Temperature: 0°C to 50°C
Pressure: 1.5 to 8 Bar
Coil voltages: 220VAC, 24VDC, 110VAC, 12VDC
100% ED IP65
Max Action: 5 Cycles/Second
Response time: 0,05s
Body material: Aluminium Alloy
Seal: NBR


P4V Series 5/2 Way Single Solenoid Pneumatic Valve

Inlet/Outlet Port Size	Exshaust Port Size	Kv	Min pressure	Max pressure		Valve no	Coil
				AC (5.5VA)	DC (4.8W)		
1/4"	1/8"	0,77	1.5 Bar	8 Bar	8 Bar	P4V210-08	C532
3/8"	1/4"	1,45				P4V310-10	C532
1/2"	1/2"	2,41				P4V410-15	C532

Dimensions

Part number	A	B	C	D	E
P4V210-08	G1/8	G1/4	21	21	3
P4V310-10	G1/4	G3/8	24	27,5	4
P4V410-15	G1/2	36	38	4	

P4V210-08

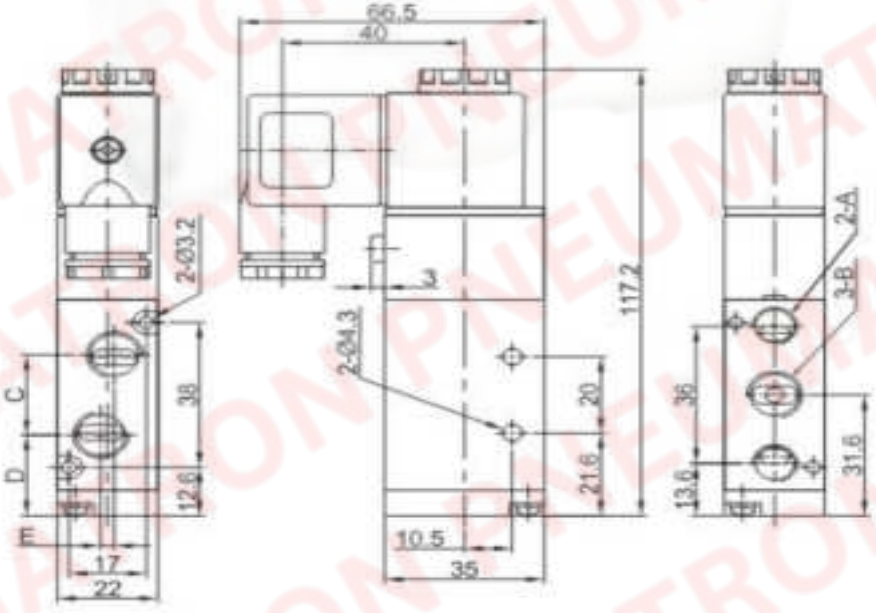


PNEUMATRON

www.pneumatron.co.za sales01@pneumatron.co.za

5/2 Way Pneumatic Solenoid Valve
P4V Series Single Solenoid Series

Dimensions

P4V310-10

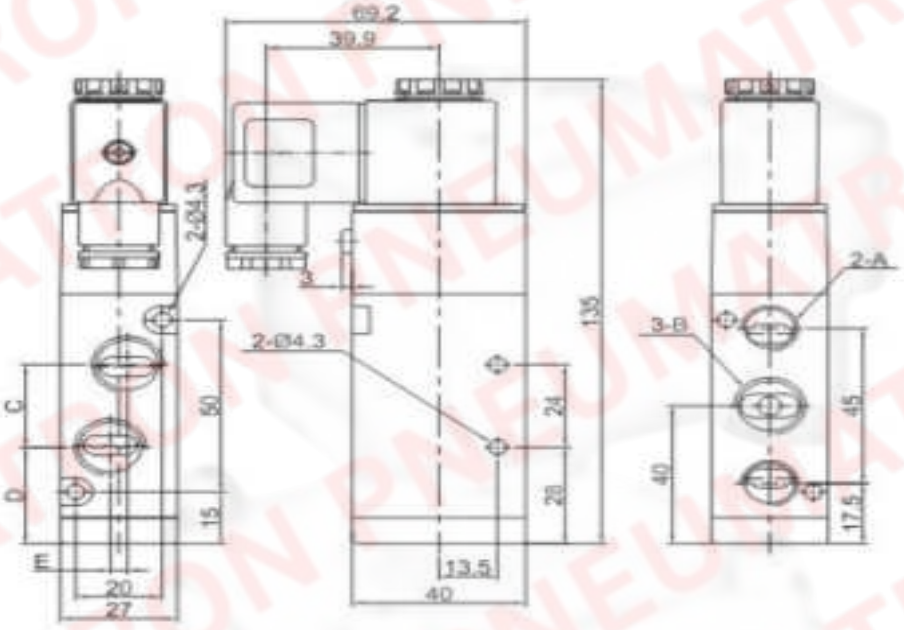

P4V410-15

