


PNEUMATRON

www.pneumatron.co.za


sales01@pneumatron.co.za

2/2 Industrial Solenoid Valve PLM222 Series , Direct Acting (N.C)

- Characteristic:**
1. Direct acting miniature construction at low power consumption
 2. Compact design to save the space
 3. Applied to low pressure system, open from 0 bar



- Medium:** Air Gas, Water
Temperature: VITON: -10°C to 140°C
Pressure: 0.0 to 13Bar (AC) (Gasses & Liquids)
Body: Brass (Standard)
Port Size: 1/4"
Orifice (mm): 2mm
Coil voltages: 220VAC, 24VDC
Coils: IP65, 100%ED

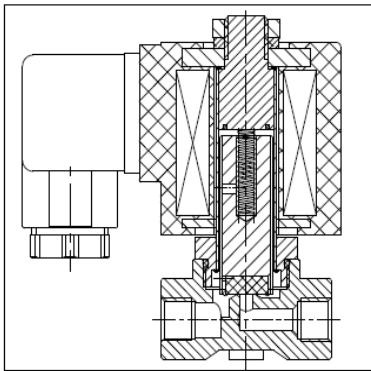

Picture does not show DIN Plug connector, but it is included.

PLM222 Series, Normally Closed with Coil

Port Size	Orifice (mm)	KV	Min Pressure	Max Pressure		Seals Material	Body Material	Valve Body	Coil
				AC (6VA)	DC (6VA)				
1/4"	2	0.22	0 Bar	13 Bar	10 Bar	VITON	Brass	PLM222BH02S02V	C11

